



### Trójniki spawane krótkie wg DIN 11852

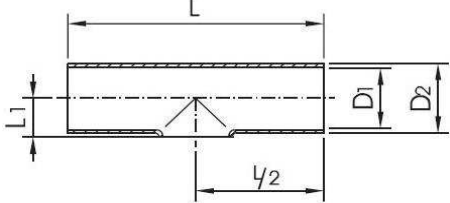

Wykonywane w gatunkach:  
1.4301(4), 1.4401(4), 1.4541

DN	D1 mm	D2 mm	L mm	L1 mm	Waga kg
15	26	28	100	16	0,09
15	26	29	100	16	0,09
20	31	34	110	19	0,12
20	32	35	110	20	0,12
25	37	40	120	22	0,15
25	38	41	120	23	0,15
32	49	52	140	29	0,24
32	50	53	140	30	0,24
40	66	70	160	40	0,46
40	81	85	180	48	0,68
50	100	104	200	59	0,92
50	125	129	375	74	1,97
65	150	154	450	90	2,89
65	200	204	600	115	5,46


### Trójniki redukcyjne wg DIN 11852

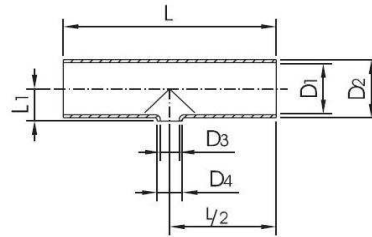

Wykonywane w gatunkach:  
1.4301(4), 1.4401(4), 1.4541

DN	D1 mm	D2 mm	D3 mm	D4 mm	L mm	L1 mm	Waga kg
25/20	25	28	19	22	100	16,5	0,09
25/20	26	29	20	23	100	17	0,09
32/25	31	34	25	28	110	19	0,12
32/25	32	35	26	29	110	19,5	0,12
40/25	37	40	25	28	120	22	0,15
40/25	38	41	26	29	120	22,5	0,15
40/32	37	40	31	34	120	22	0,15
40/32	38	41	32	35	120	22,5	0,15
50/25	49	52	25	28	140	29	0,24
50/25	50	53	26	29	140	29,5	0,24
50/40	49	52	37	40	140	29	0,24
50/40	50	53	38	41	140	29,5	0,24
65/25	66	70	25	28	160	39	0,47
65/25	66	70	26	29	160	39	0,47
65/40	66	70	37	40	160	39	0,46
65/40	66	70	38	41	160	39	0,46
65/50	66	70	49	52	160	39	0,46
65/50	66	70	50	53	160	39	0,46
80/25	81	85	25	28	180	46,5	0,70
80/25	81	85	26	29	180	46,5	0,70
80/40	81	85	37	40	180	46,5	0,70
80/40	81	85	38	41	180	46,5	0,70
80/50	81	85	49	52	180	46,5	0,68
80/50	81	85	50	53	180	46,5	0,68
80/65	81	85	66	70	180	46,5	0,68
100/25	100	104	25	28	200	56	1,00
100/25	100	104	26	29	200	56	1,00
100/40	100	104	37	40	200	56	1,00
100/40	100	104	38	41	200	56	1,00
100/50	100	104	49	52	200	56	1,00
100/50	100	104	50	53	200	56	1,00
100/65	100	104	66	70	200	56	0,97
100/80	100	104	81	85	200	56	0,97
125/25	125	129	25	28	374	68,5	2,00
125/25	125	129	26	29	374	68,5	2,00
125/40	125	129	37	40	374	68,5	2,00
125/40	125	129	38	41	374	68,5	2,00
125/50	125	129	49	52	374	68,5	2,00
125/50	125	129	50	53	374	68,5	2,00
125/65	125	129	66	70	374	68,5	1,97
125/80	125	129	81	85	374	68,5	1,97
125/100	125	129	100	104	374	68,5	1,97
150/25	150	154	25	28	450	81	2,95
150/25	150	154	26	29	450	81	2,95
150/40	150	154	37	40	450	81	2,95
150/40	150	154	38	41	450	81	2,95
150/50	150	154	49	52	450	81	2,95
150/50	150	154	50	53	450	81	2,95
150/65	150	154	66	70	450	81	2,89
150/80	150	154	81	85	450	81	2,89
150/100	150	154	100	104	450	81	2,89
150/125	150	154	125	129	450	81	2,89

### Trójniki spawane długie wg DIN 11852



Wykonywane w gatunkach:  
1.4301(4), 1.4401(4), 1.4541

DN	D1 mm	D2 mm	L mm	L1 mm	Waga kg
15	26	28	100	50	0,10
15	26	29	100	50	0,10
20	31	34	110	55	0,13
20	32	35	110	55	0,13
25	37	40	120	60	0,21
25	38	41	120	60	0,21
32	49	52	140	70	0,29
32	50	53	140	70	0,29
40	66	70	160	80	0,62
40	81	85	180	90	0,85
50	100	104	200	100	1,62
50	125	129	375	188	2,71
65	150	154	450	225	3,88
65	200	204	600	300	7,10