


TKC TKC Connection DIN 32676

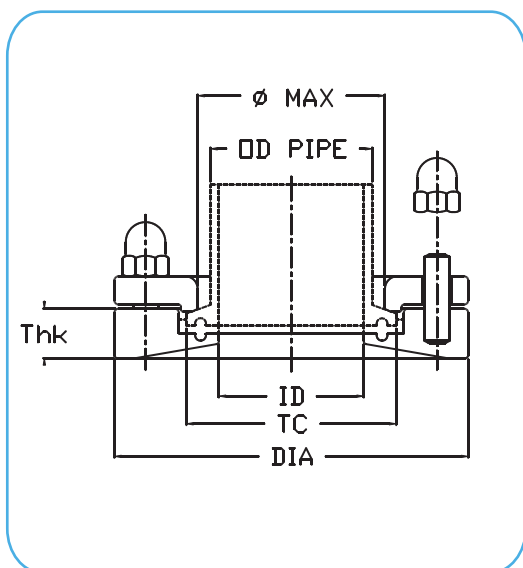

CODE	Size	ØTC	ID	OD pipe	Ømax	DIA	Thk std (mm) #	Thk (mm) #	Thk (mm) #	Thk (mm) #	Bolts
TKC-CE0#-12A	10	34	10	12 - 14	23.5	70	15	25	38	51	4 x M8
TKC-CG0#-12A	15	34	16	18 - 20	23.5	70	15	25	38	51	4 x M8
TKC-CH0#-12A	20	34	20	22 - 24	45	70	15	25	38	51	4 x M8
TKC-CJ0#-12A	25	50.5	26	28 - 30	45	85	17	25	38	51	4 x M8
TKC-CL0#-12A	32	50.5	32	34 - 36	45	85	17	25	38	51	4 x M8
TKC-CM0#-12A	40	50.5	38	40 - 42	45	85	17	25	38	51	4 x M8
TKC-CN0#-12A	50	64	50	52 - 54	71	100	17	25	38	51	4 x M8
TKC-CO0#-12A	65	91	66	70	85	130	20	25	38	51	6 x M8
TKC-CP0#-12A	80	106	81	85	93	146	20	25	38	51	6 x M8
TKC-CR0#-12A	100	119	100	104	113	170	20	25	38	51	8 x M8

Technical Information:

Tri-Clamp Connections: according to DIN 32676 - REIHE A

Welding Flange Material: AISI 316L – 1.4404 | *on request 1.4435 or other special steels* |

Locking Ring Material: AISI 316L – 1.4404

Bolts and Nuts Material: AISI 304 – 1.4301

Internal Surface Finish: Ra ≤ 0.5µm → code **12** e.g.: TKC-CE015-**12A**

Optional: For customized TKC-C Connections, please contact us.

Specifications:

Regulatory: designed according to PED 2014/68/EU directive, ASME VIII Div.2 and F.E.M. (Finite Element Method) calculated, approved and certified by notified body.

Design Pressure: 7 barg (101,5 psig)

Design Temperature: -80°C to 200°C [-112°F to 392°F]

Note: The applied gasket (not included) may have different design temperature and/or pressure limits than the TKC. The weakest component in the assembled product determines the maximum design temperature and pressure limits.

Marking: Each TKC Connection is marked with Heat No. for full lot traceability.

CONFIGURATOR



DATASHEETS



Last updates can be found on our website - www.aerreinox.it
In the interests of development of the product, we reserve the right to change the specifications without prior notice