


KLAMRY TC - Typ SH - SAFX - Safety do normalnych i dużych obciążeń						
Rozmiar nominalny	F - Ø talerzyka	B - promień	C - długość	W - szerokość	Waga [kg]	Kod
1/2"-3/4"	25,0	55,0	65,0	17,0	0,17	KL.SAFX.0050
DN 10/15/20	34,0	58,0	75,0	17,0	0,21	KL.SAFX.D010
1"-1 1/2"	50,5	68,0	92,0	17,0	0,27	KL.SAFX.0100
2"	64,0	73,0	107,0	17,0	0,34	KL.SAFX.0200
2 1/2"	77,5	78,0	121,0	17,0	0,38	KL.SAFX.0250
3"	91,0	85,0	138,0	17,0	0,44	KL.SAFX.0300
3 1/2"	106,0	92,0	153,0	17,0	0,49	KL.SAFX.0350
4"	119,0	97,0	166,0	17,0	0,53	KL.SAFX.0400
4 1/2"	130,0	102,0	191,0	17,0	0,57	KL.SAFX.0450
5"	144,0	111,0	198,0	19,0	0,80	KL.SAFX.0500
5 1/2"	155,0	126,0	242,0	24,0	1,41	KL.SAFX.0550
6"	167,0	130,0	250,0	24,0	1,43	KL.SAFX.0600
6 5/8"	183,0	136,0	265,0	24,0	1,62	KL.SAFX.0658
8"	217,0	158,0	314,0	24,0	2,26	KL.SAFX.0800
8 5/8"	233,0	164,0	326,0	24,0	2,38	KL.SAFX.0858
10"	268,0	181,0	366,0	24,0	2,80	KL.SAFX.1000
10 5/8"	286,0	190,0	384,0	24,0	2,98	KL.SAFX.1058
12"	319,0	216,0	430,0	24,0	3,55	KL.SAFX.1200
12 5/8"	338,0	213,0	425,0	24,0	3,47	KL.SAFX.1258

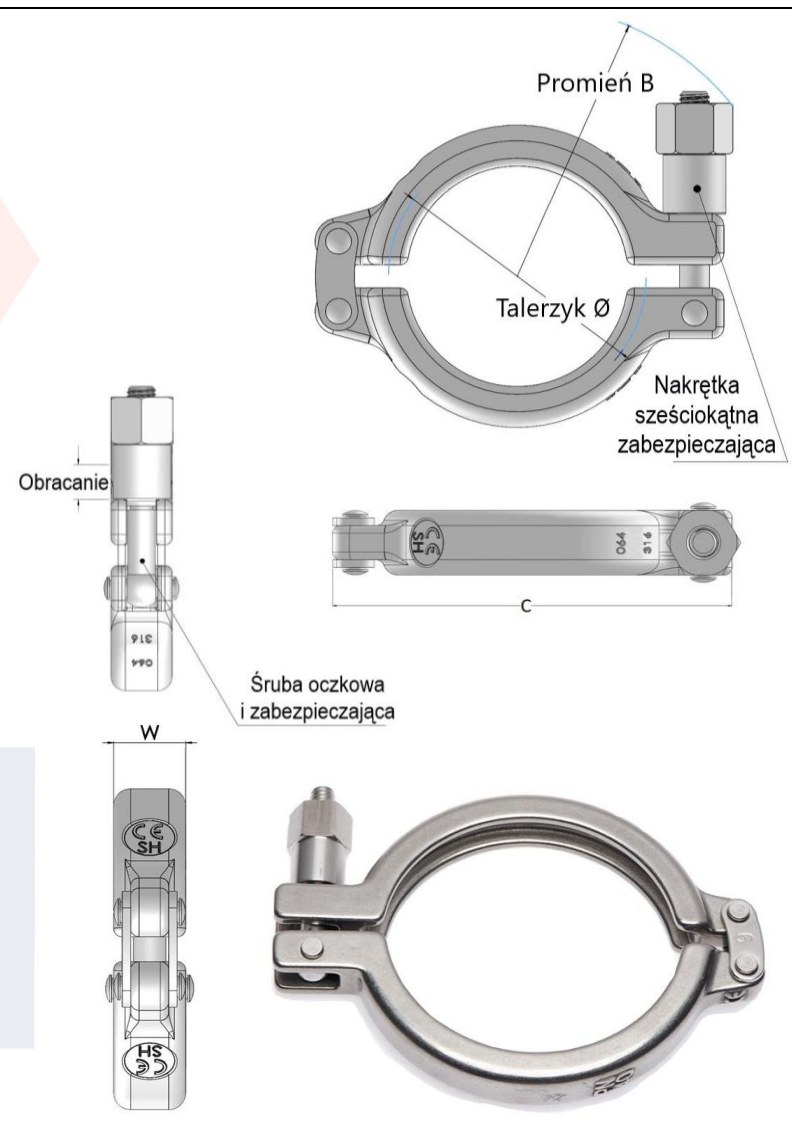

Materiał: AISI 316 (1.4401)

Zastosowanie: do normalnych i dużych obciążeń (Normal / Heavy Duty)

Funkcja bezpieczeństwa: sworzeń bezpieczeństwa, śruba oczkowa i nakrętka (Safety Gate, Eye-Bolt & Nut)

Wymiary - F - B - C - W - podano w [mm]